




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B65H 37/00, G03G 15/00	A1	(11) International Publication Number: WO 92/12087 (43) International Publication Date: 23 July 1992 (23.07.92)
(21) International Application Number: PCT/US91/09526 (22) International Filing Date: 19 December 1991 (19.12.91)	(74) Agent: KESSLER, Lawrence, P.; 343 State Street, Rochester, NY 14650-2201 (US).	
(30) Priority data: 636,785 2 January 1991 (02.01.91) US 636,786 2 January 1991 (02.01.91) US 636,792 2 January 1991 (02.01.91) US	(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).	
(71) Applicant: EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, NY 14650 (US).	Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(72) Inventors: SHEA, Robert, Howard ; 7330 Willowbrook Road, Victor, NY 14564 (US). HACKNAUER, Frank ; 500 Phelps Road, Honeoye Falls, NY 14472 (US). RUSSEL, Steven, Matthew ; 30 Golf Avenue, Pittsford, NY 14534 (US).		

(54) Title: MODULAR FINISHER FOR A REPRODUCTION APPARATUS

(57) Abstract

An improved modular finisher apparatus (10), for use with a reproduction apparatus (12) producing reproduction sets, for forming completely finished reproduction sets. The improved finisher apparatus comprises a receiver (24) for receiving sheets of reproduction sets from the reproduction apparatus. A first feed path (R) extends from the receiver to a sheet collector (34) where received sheets are directed. Collected sheets are stapled into finished reproduction sets. A second feed path extends from the sheet collector to a set collector (50) where finished reproduction sets are collected. The finisher also includes at least one of the following devices: a Z-folder (70), a saddle stitcher (90), and an insert tray (150). Sheet transport paths (P_{1a}, P₃, P₄) are provided to any of the included devices.

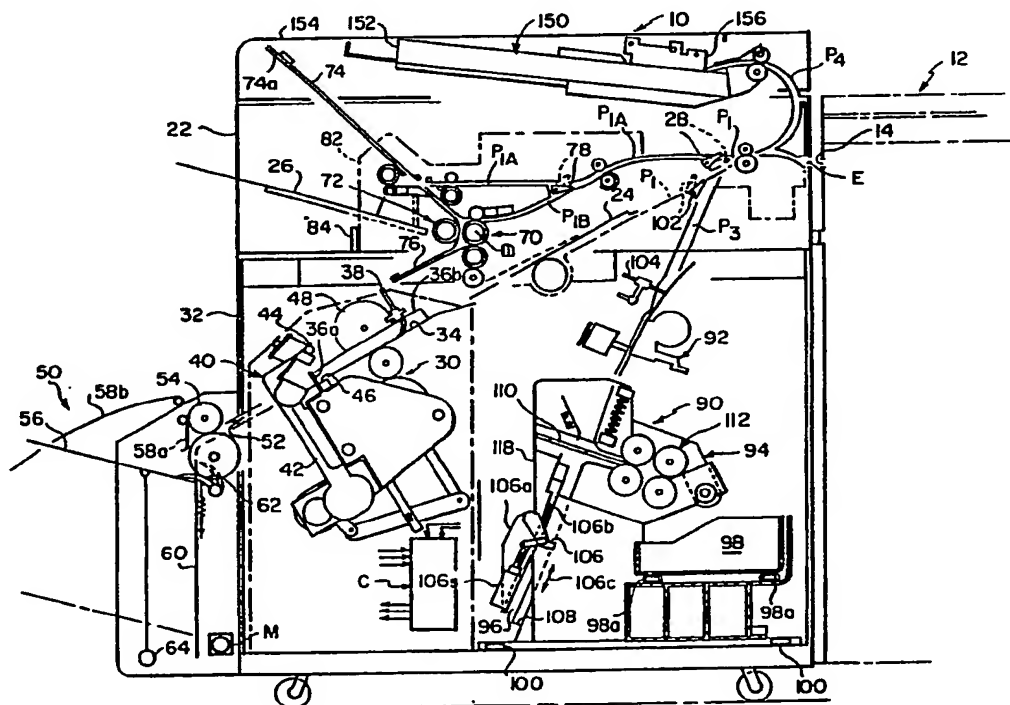

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
DE	Germany	MC	Monaco	TG	Togo
DK	Denmark			US	United States of America

- 1 -

MODULAR FINISHER FOR A REPRODUCTION APPARATUS**BACKGROUND OF THE INVENTION**

5 This invention relates in general to finishers for use with reproduction apparatus, and more particularly to a modular finisher which includes a stapling device and may optionally include any combination of auxiliary devices including a supplemental sheet insert tray, a Z-folding device, or a saddle stitcher.

10 Today's ever increasing document information flow, in the form of paper documents, necessitates the ability to reproduce multi-page documents in a timely and efficient manner. As a result, reproduction apparatus, such as electrostatographic copier/duplicators, electronic printers, or the like, have been significantly improved as to their sophistication of operation, ease of use, and speed. In order to take full
15 advantage of high speed reproduction apparatus, handling of the original information to be reproduced and of the completed reproductions into completely finished sets so as to match overall reproduction output productivity with reproduction apparatus speed has assumed increased importance.

20 Recent significant advances in the state of the art of reproduction apparatus deal with the handling of original information for information input to such apparatus. One such novel original information handling device, referred to as a recirculating document feeder, is shown for example in U.S. -A- 4,169,674. With the
25 recirculating document feeder of the shown type, document sheets from a collated document sheet stack are circulated seriatim from the stack of document sheets to an exposure station of a reproduction apparatus for copying and then returned to such stack, in order, a number of times equal to the desired number of reproductions to be made of such stack.
30 As a result, the collected reproductions are in precollated sets which eliminates the need for further complex and expensive collation equipment. Of course, reproduction apparatus which handle original information electronically may also produce the desirable precollated reproduction sets.

35 The production of precollated reproduction sets has an additional advantage in that the sets are immediately available for

- 2 -

further handling to provide desired completely finished reproduction sheet sets. This of course improves the overall productivity of the reproduction system. A typical example of such further reproduction sheet set handling is stapling of the sheets in a set together to form the
5 completely finished reproduction set. Finisher apparatus to carry out reproduction set stapling is shown in U.S. -A- 4,134,672.

Although finishers of the above type have been very successful, they are limited in that they typically can effect only one type of finishing. Completed reproduction sets may require additional or other
10 finishing operations, such as for example folding oversized sheets, saddle stitching the reproduction set to form a booklet, or insertion of supplemental sheets (e.g., covers). Separate auxiliary devices to accomplished these various ends are available in the industry today, although for the most part these devices are of the off-line type. That is
15 to say, such auxiliary devices are not integrally associated with the reproduction apparatus (and basic finisher apparatus) and require either manual or mechanical intervention to bring reproduction sets to such devices in a form in which such auxiliary devices can perform the desired operation thereon. This adds expense to the overall reproduction
20 process, and complexity to the total reproduction apparatus system, without adding to the efficiency or increasing the productivity of operation thereof.

Moreover, in the case of auxiliary saddle stitchers, typical saddle stitchers employ a knife blade to urge a stack of sheets to be folded
25 through a pair of folding rollers. The force on the folding rollers and their initial spacing requires particular complex adjustment to assure a neat, complete fold for various sheet stack thicknesses without damaging the stack. Such adjustment has in practice been difficult to accurately control.

30 SUMMARY OF THE INVENTION

This invention is directed to an improved modular finisher apparatus, for use with a reproduction apparatus, for forming completely finished reproduction sets. The improved finisher apparatus comprises a receiver for receiving sheets of reproduction sets from the reproduction
35 apparatus. A first feed path extends from the receiver to a sheet collector where received sheets are directed. Collected sheets are stapled

- 3 -

into finished reproduction sets. A second feed path extends from the sheet collector to a set collector where finished reproduction sets are collected. The finisher also includes at least one of the following devices: a Z-folder, a saddle stitcher, and an insert tray. Sheet transport
5 paths are provided to any of the included devices.

Further, the improved saddle stitcher comprises a support frame mating with the finisher mechanism for detachably accepting modular devices to enable the frame to be received therein. A sheet feed path for receiving reproduction sheets is associated with the support frame,
10 and an adjustable mechanism for registering reproduction sheets and thereafter stapled reproduction sets is mounted on the frame. Further, a mechanism associated with the frame is provided for stapling reproduction sheets at substantially the mid-line thereof, and for folding a stapled reproduction set substantially along the mid-line thereof.
15 Accordingly, reproduction sheets are registered and stapled into a reproduction set, and thereafter the stapled reproduction set is reregistered and folded. Folded stapled reproduction sets are collected in an output hopper for operator retrieval.

In a preferred embodiment of the improved saddle stitcher
20 according to this invention, the mechanism for folding stapled reproduction sets includes an elongated knife blade and a plurality of pairs of nip rollers, the knife blade arranged to urge a stapled reproduction set sequentially through the pairs of nip rollers and then into an output hopper. The knife blade is mounted for reciprocation in
25 a plane passing through the mid-line of a stapled reproduction set and the nips of the pairs of nip rollers. Reciprocation of the knife blade may be at an angle to the nip line of the pairs of nip rollers to pass through the nips thereof progressively, whereby the fold in a reproduction set is effected sequentially in the direction of the fold during a segment of the
30 travel distance of such reproduction set through the nips. The mechanism for reciprocating the knife blade includes a rotatable drive shaft, at least one crank rotatably driven by the drive shaft, at least one link connected to the at least one crank at one end and connected at its opposite end to the knife blade. Further, one roller of each of the
35 plurality of pairs of nip rollers is supported in a frame, and the other roller of each of the plurality of pairs of nip rollers is

- 4 -

supported in a subframe. The subframe is pivotably connected and urged toward the frame. The pivot point is located downstream, in the direction of travel of a reproduction set being folded, from the plurality of pairs of nip rollers, and the mechanism for urging the subframe
5 toward the frame is located upstream, in the direction of travel of a reproduction set being folded, from the plurality of pairs of nip rollers. Accordingly, a progressively increasing mechanical advantage is exhibited at each of the nip roller pairs.

The invention, and its objects and advantages, will become more
10 apparent in the detailed description of the preferred embodiment presented below.

BRIEF DESCRIPTION OF THE DRAWINGS

In the detailed description of the preferred embodiment of the invention presented below, reference is made to the accompanying
15 drawings, in which:

Figure 1 is a front elevational view, in cross-section, of the modular finisher according to this invention, with portions shown schematically, removed, or broken away to facilitate viewing;

Figure 2 is a view in perspective of the support tray of the
20 stapling module of the modular finisher;

Figure 3a and 3b are plan and front elevational views respectively of a sheet folded by the Z-folder of the modular finisher;

Figures 4a-4h are front elevational views showing, in sequence, the steps of operation for the Z-folder of the modular finisher;

25 Figure 5 is a top plan view of the folding mechanism of the saddle stitcher of the modular finisher according to this invention, with portions removed or broken away to facilitate viewing;

Figures 6a-6c are rear elevational views of the folding mechanism of the saddle stitcher, in cross-section and with portions removed or
30 broken away, respectively taken along the lines designated 6a-6a, 6b-6b, and 6c-6c of Fig. 5;

Figure 7 is a side elevational view of the compression assembly of the saddle stitcher folding mechanism; and

Figures 8a and 8b are front and side elevational views
35 respectively of an alternate embodiment of the folding nip roller

- 5 -

pairs and knife blade of the folding mechanism for the saddle stitcher of the modular finisher apparatus according to this invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the accompanying drawings, Fig. 1 shows the improved modular finisher apparatus according to this invention, designated generally by the numeral 10. The finisher apparatus 10 may be associated with an electrostatographic copier or copier/duplicator, a thermal or electronic printer, or a photographic printer, or any other like reproduction apparatus. The reproduction apparatus of the illustrated embodiment, shown only in part in Fig. 1, is designated generally by the numeral 12. The purpose of the modular finisher 10 is to efficiently finish reproduction sets from any conventional well known reproduction apparatus to form completely finished reproduction sets of a desired configuration at a speed which makes maximum use of the speed of the reproduction apparatus. As used herein, the term "reproduction sheets" refers to sheets bearing information reproduced in any well known manner by the reproduction apparatus or other sheets inserted into a reproduction set, such as for example blank sheets, cover sheets or tab stock; and the term "reproduction sets" refers to a plurality of reproduction sheets which when viewed together make up a copy corresponding to a multi-page original information bearing document.

The timing and control of the various operative components of the modular finisher apparatus 10 with respect to each other and to the reproduction apparatus are controlled by a logic and control unit C including a microprocessor for example. The microprocessor receives input and timing signals from sensors (not shown) located at points in the paths of sheets through the finisher and associated with the components of the finisher. Based on such signals and a program for the microprocessor, the unit C produces signals to control the operation of the various components of the finisher. The production of a program for commercially available microprocessors suitable for use with this invention is a conventional skill well understood in the art. The particular details of any such program would, of course, depend on the architecture of the selected microprocessor.

Typical high productivity reproduction apparatus reproduce information on individual sheets in a precollated manner so that the

- 6 -

5 sheets upon exiting the apparatus (at chute 14 in the illustrated embodiment) may be readily grouped into reproduction sets. To provide precollated reproduction sets of information contained in a document sheet stack, the reproduction apparatus may include a recirculating document feeder of the type described in the aforementioned U. S. Patent No. 4,169,674, operating to recirculate document sheets from a document sheet stack seriatim from the stack of document sheets to an exposure station of a reproduction apparatus for copying and then returned to such stack, in order, a number of times equal to the desired number of reproductions to be made of such stack. Alternatively, such as with reproduction apparatus including a mechanism for capturing or creating information electronically, information can be electronically acquired and saved in a memory storage device to thereafter be recalled at a desired time to form the desired number of multiple precollated reproductions sets.

As noted above, the production of precollated reproduction sets enables the ready production of completely finished reproduction sets to markedly improve the overall productivity of the reproduction system. The finisher 10 according to this invention, constructed to provide a device in modular form which can accomplish the production of completely finished reproduction sets in a selectable variety of forms, includes an upper transport module 20, a stapling module 30, and an output hopper 50. Additionally, the finisher has provisions for optional auxiliary devices selected from the group including a Z-folder 70, a saddle stitcher 90, and an insert tray 150. By its unique construction, the modular finisher 10 according to this invention can readily accommodate any combination of the optional auxiliary devices.

The upper transport module 20 of the finisher 10 is incorporated in a self-contained housing 22 having a first transport path P_1 . The transport path P_1 is defined, for example, by wire-form or sheet metal guides and driven nip rollers located at appropriately spaced intervals with respect to the guides. The upper transport module 20 is positioned such that the entrance E to the path P_1 is adjacent to the chute 14 of the reproduction apparatus 12. In this manner, the information-bearing reproduction sheets of a reproduction set exiting the apparatus 12 are received seriatim in the path P_1 and directed under normal operating circumstances to a sheet delivery station 24.

- 7 -

The sheet delivery station 24 (which may be for example of the type shown and described in U.S. Pat. No. 4,930,765, issued June 5, 1990, in the name of Russel et al) directs the received sheets of a reproduction set to the stapling module 30. The station 24 includes a
5 selectively adjustable ramp which elevates at selected intervals to guide delivered sheets in a manner that assures that subsequently delivered sheets are directed to the top of a stack of sheets as they are collected in the stapler module 30 described hereinbelow. It is readily apparent that without such elevation of the delivery station ramp, there may be a
10 condition where such subsequently delivered sheets jam into the previously delivered sheets.

Under certain circumstances, it may be desired to review a full reproduction set prior to accomplishing finishing operations thereon. Accordingly, the upper transport module 20 also includes a bypass
15 transport path P_{1A} similarly defined by wire-form or sheet metal guides and spaced driven nip rollers. In path P_{1A} , sheets are directed to a proof set hopper 26 readily accessible to an operator for retrieval and review. A diverter 28 normally positioned (solid line position of Fig. 1) to maintain transport of sheets along the path P_1 . However, when it is
20 desired to review a reproduction set prior to finishing, the diverter 28 is selectively moved by a solenoid actuator, for example, to a position (broken line position of Fig. 1) to direct sheets into the Path P_{1A} . Typically under a circumstance when review of a reproduction set is desired prior to finishing, the reproduction apparatus may be
25 programmed to produce an additional reproduction set to the desired number of reproduction sets. The sheets constituting the first reproduction set are directed to the hopper 26 to form, in effect, a proof set for the desired review. Production of the second set may then be delayed for a period of time sufficient to accomplish review of the proof
30 set. If, after review, the proof set is found to be in the desired condition ready for finishing, the diverter 28 is returned to its normal position so that sheets constituting the second reproduction set (and all subsequently produced reproduction sets) are directed to the sheet delivery station

35

- 8 -

24 to begin the finishing process. Of course, if the reproduction set is not in the desired condition, the operation of the reproduction apparatus 12 can be cancelled and reset to correct the condition of the set before repeating the reproduction process.

5 The stapling module 30 is incorporated in a self-contained housing 32. The housing 32 serves to support the housing 22 of the upper transport module 20 at a desired vertical location relative to the sheet exit chute 14 of the reproduction apparatus 12. The stapling module includes a tray 34 positioned to accept the sheets making up a
10 full reproduction set from the sheet delivery station 24 of the upper transport module 20. The sheets of the reproduction set, delivered seriatim through the station 24, are respectively corner registered on the tray 34 against a registration gate 36a selectively located to intercept the reproduction set travel path and an edge guide 36b at right angles to the
15 gate. Such corner registration may be effected for example by a rotating flexible disk jogger 38, or any other well known mechanism which can urge the individual sheets of the reproduction set in a direction perpendicular to sheet travel against the gate and edge guide. As illustrated in Fig. 2, a sheet S is moved in mutually perpendicular
20 directions respectively by the jogger 38, rotating in the direction of its associated arrow, and under the influence of gravity, in the general direction of sheet travel. The sheet S thus moves from its solid line position through its broken line position into the corner formed by gate 36a and edge guide 36b.

25 Once all of the sheets making up the full reproduction set are properly corner registered, a stapling assembly 40 controlled by unit C is activated to place staples at a desired location (or plurality of locations) along the lead edge of the reproduction set registered against the gate 36a. An exemplary stapling assembly is shown and described in U.S. Pat.
30 No. 4,903,952, issued Feb. 27, 1990, in the name of Russel et al. The stapling assembly 40, of the type disclosed in the Russel et al patent, is described herein only to the extent necessary for a complete understanding of the modular finisher 10 according to this invention. Such stapling assembly includes a single staple unit 42 movable along
35 rails relative to the lead edge of the registered reproduction set, and has an off-set pivotable clincher 44 operating in timed conjunction with a

- 9 -

staple head 46 to effect stapling of such registered set. Of course, the stapling assembly may be of any suitable construction, such as for example having a plurality of relatively fixed location staple heads, or having a pivotable staple head acting in conjunction with a relatively fixed location clincher. After the reproduction set has been stapled by the stapling assembly 40, the registration gate 36a is moved to a remote location (out of the travel path for the stapled reproduction set) and an ejector roller 48 urges the stapled set from the tray 34 toward the output hopper 50.

The output hopper 50 is attached to the housing 32 adjacent to an external wall thereof. An entrance slot 52 in the external housing wall provides for communication between the output hopper 50 and the stapling module 30. As such, stapled reproduction sets (or alternatively sets which pass directly through the stapling module without being stapled) are directed to the output hopper and stacked for ready operator retrieval. A pair of foam rollers 54 urge the reproduction sets toward a tray 56 angled from the horizontal in an "up hill" direction relative to the path of the incoming reproduction sets. The rollers 54 are of a relatively large diameter foam construction to enable the rollers to handle a wide variety of thicknesses of reproduction sets. A pair of dangler arms 58a, 58b, formed of relatively light weight flexible material intercept the travel path of the incoming reproduction sets to urge the sets onto the tray 56.

Due to the angle of the tray 56 with respect to the horizontal, the incoming reproduction sets are urged by gravitational forces to a location where their initial trailing longitudinal edge becomes the leading edge and engages a guide plate 60. In this manner the stack of reproduction sets on the tray 56 are relatively aligned against the guide plate. A plurality of fingers 62 (one shown in Fig. 1) are movable under the control of unit C to a remote position (broken line) relative to the incoming reproduction sets as a set is being registered against the guide plate 60, and to a position (solid line) overlying the set stack once a set has been registered. The fingers 62 are spring urged for example to apply a downward force on the stack of reproduction sets on the tray 56 to hold the set stack against the guide plate 60 thereby substantially preventing dishevelment of the stack.

- 10 -

The elevation of the tray 56 is controlled by an elevator mechanism 64 of any suitable type, such as for example a spring-urged support, a rotating screw thread, a chain drive or the like. The tray 56 is lowered by the elevator mechanism 64 as reproduction sets are delivered and stacked on the tray. Further, a motor M connected to the output hopper 50 selectively reciprocates the hopper in a direction cross-track relative to the path of incoming reproduction sets delivered to the tray 56. The timing of reciprocation of the output hopper is selected such that sequentially received reproduction sets are offset for ease of separation and removal from the tray by an operator.

Turning now to the optional auxiliary devices, the the module defining the Z-folder 70 will first be described. The Z-folder 70 is for the express purpose of folding large individual sheets into a reduced overall size where the folded sheets can be included for example in a booklet or stack with other smaller sized sheets. As an illustrative example, an 11"x17" sheet is folded so that its overall dimensions are 11"x8 1/2" (see Figs. 3a, 3b) for inclusion in a reproduction set with basic overall dimensions of 11"x8 1/2". The Z-folder 70 includes a driven cluster of rotating rollers 72 and sheet guide chutes 74 and 76 which cooperatively act on a sheet to achieve the desired folded configuration for the sheet. The cluster of rollers 72 and guide chutes 74 and 76 are mounted on a frame 82 readily receivable in the housing 22 of the upper transport module 20 on cooperating slide guides 84 for example. In this manner, if it is desired to include a Z-folder in the finisher 10, a Z-folder module is merely slid into place in the finisher.

When it is desired to effect folding of a sheet, such sheet is transported along the path P_{1A} and then directed by a diverter 78 into the path P_{1B} . The diverter 78 is controlled for example by a solenoid actuator for movement to a position (solid line position of Fig. 1) for directing sheets along the path P_{1A} to the Z-folder 70 or to a position (broken line position of Fig. 1) for directing sheets to the proof set hopper 26.

In the folding operation for the Z-folder 70, a sheet Z in the path P is urged into the nip between rotating roller 72a, driven by a motor to become a driving roller, and idler roller 72b of the roller cluster 72 (see Fig. 4a). The roller pair 72a, 72b urge the

- 11 -

sheet into the upper chute 74 until the lead edge of the sheet engages an adjustable stop 74a (see Fig. 4b). The adjustment of the stop 74a is selected such that the distance between the stop 74a and the first fold nip between the rollers 72a and 72c is substantially equal to the desired
5 distance between the lead edge of the sheet and the first fold F_1 (see also sheet S in Figs. 3a, 3b). Since the stop 74a prevents the sheet Z from moving further into the chute 74, the urging of the sheet by the rollers 72a and 72b causes the sheet to buckle and be fed into the first fold nip between the rollers 72a and 72c (see Fig. 4c). The first fold F_1
10 is then formed by the rollers 72a and 72c, and the folded sheet is urged by such rollers into the lower chute 76 (see Fig. 4d).

The sheet Z, with the first fold F_1 now being the leading edge, continues to be driven into the chute 76 until such new lead edge engages the stop 76a (see Fig. 4e). Similarly to the action described
15 above relative to accomplishing the first fold F_1 , the stop 76a prevents the sheet from moving further into the chute 76. The urging of the sheet Z by the rollers 72a and 72c thus causes the sheet to buckle and be fed into the second fold nip between the rollers 72a and 72d (see Fig. 4f). The second fold F_2 is then formed by the rollers 72a and 72d (see Fig.
20 4g), and the folded sheet is thereafter urged by such rollers in a direction out of the Z-folder opposite to its incoming direction (see Fig. 4h). The distance between the stop 76a and the second fold nip between the rollers 72a and 72d is designed to assure that the distance between the second fold F_2 and the initial lead edge of the sheet Z is substantially
25 equal to the desired overall dimension of the sheet in the in track direction for the Z-folded sheet. The Z-folded sheet is then directed by the rollers 72a and 72d to an area where the sheet overlies the sheet delivery station 24. When the sheet clears the driven roller cluster 72 of the Z-folder, it is urged by a dangler member 80 onto the station 24, and
30 then, under the influence of gravity, changes its direction of travel. The folded sheet can thus be delivered through the finisher 10 for any desired further operation thereon, just as any other delivered sheet.

A unique aspect of the Z-folder 70 is that it is constructed so as not to interfere with the bypass of sheets to the proof set hopper 26 even
35 though it crosses the path P_{1A} thereto. To accomplish this end, the upper chute 74 of the Z-folder has a slot 74b formed

- 12 -

therein (see Fig. 1). The slot 74b is aligned with the path P_{1A} so that a sheet traveling in such path can be directed without interference to the hopper 26. This arrangement serves to enable the finisher 10 according to this invention to have its desired multi-functionality in a distinctly compact configuration.

The module defining the optional saddle stitcher 90 of the modular finisher 10 according to this invention is for the purpose of providing the finisher with the capability of making center stapled and folded booklets. The saddle stitcher 90 has five major components: a transport path P_3 , a stapling mechanism 92, a folding mechanism 94, an edge registration assembly 96, and a booklet-receiving output hopper 98. As with the optional Z-folder module 70, the major components of the saddle stitcher are readily receivable in the finisher 10. Particularly, the major components are, for example, slidably receivable on cooperating slide guides 100 in the housing 32. In this manner, if it is desired to include a saddle stitcher module 90 in the finisher 10, the components of the saddle stitcher module are merely received in place in the finisher.

The transport path P_3 for the saddle stitcher 90 is located such that it communicates with the path P_1 of the upper transport module 20 downstream, in the direction of sheet travel, from the diverter 28. A diverter 102, associated with the path P_3 , is movable for example by a solenoid actuator to a position (solid line position of Fig. 1) remote from the path P_1 , or to a position (broken line position of Fig. 1) intercepting the path P_1 to direct sheets into the path P_3 . Sheets received seriatim in the path P_3 are aligned in the cross-track direction by a jogger mechanism 104 (similar for example to the jogger 38 associated with the stapling module 30).

The lead edges of the respective cross-track aligned sheets comprising a reproduction set are registered against a first gate 106 of the registration assembly 96 located to intercept the path P_3 . In order to accommodate for formation of neat booklets from reproduction sets of various overall dimensions, the gate 106 must be adjustable along the path P_3 to properly locate the center staples for the booklets. Accordingly, the gate 106 is mounted on a support 106a adjustable

35

- 13 -

along a slide bar 106b in the direction of sheet travel (i.e., the direction of arrow 106c in Fig. 1). Adjustment of the support 106a positions the first gate 106, when in its path intercepting position, to locate the lead edges of the delivered sheets at a preselected distance
5 from the stapling line defined by the stapling mechanism 92. Such preselected distance is desirably substantially equal to one-half the dimension of the sheets in the sheet travel direction.

Once the requisite number of sheets for completing a full reproduction set have been delivered to the saddle stitcher module 90,
10 the stapling mechanism 92 thereof is actuated by the control unit C to staple the reproduction set along the stapling line, substantially corresponding to the center line of the sheets in the sheet travel direction. After stapling has been accomplished, the gate 106 is pulled out of the path P_3 by a solenoid actuator 106s enabling the stapled
15 reproduction set to continue its travel in the path P_3 under the influence of gravity for example. The stapled reproduction set continues its travel until the lead edge thereof is registered against a second gate 108 located to intercept the path P_3 downstream of the gate 106.

The gate 108 is adjustable in the direction of sheet travel to
20 locate the lead edges of the delivered stapled reproduction set sheets at a preselected distance from the folding line defined by the folding mechanism 94. Such preselected distance is desirably substantially equal to one-half the dimension of the sheets in the sheet travel direction. Another way of looking at the adjustable placement of the gate 108 is
25 that the gate 108 should be located a distance from the gate 106 substantially equal to the distance between the stapling line defined by the stapling mechanism 92 and the folding line defined by the folding mechanism 94. In this manner, when the stapled reproduction set is delivered to the gate 108, the established folding line will correspond to
30 the stapling line such that folding accomplished by the mechanism 94 occurs on the center line of the sheets in the sheet travel direction resulting in formation of a neat booklet from the reproduction set.

As is apparent, the distance between the staple line as defined by the stapling mechanism 92 and the folding line as defined by the
35 folding mechanism 94 is fixed. Accordingly, any adjustment of the

- 14 -

first gate 106 necessitates a similar (substantially equal) adjustment of the second gate 108. Therefore, for the simplicity of construction and convenience of operation, the adjustability of the second gate 108 may be accomplished by connecting the second gate to the support 106a for the first gate for movement therewith to provide simultaneous corresponding adjustment of the gates.

The folding mechanism 94 includes a knife blade 110 selectively actuatable into cooperative relation with a double set of folding nip rollers 112. As more particularly shown in Figs. 5 and 6a-6c, the knife blade 110 is supported by a bar 114 which is, in turn, mounted for reciprocation in linear slides 116 provided respectively in spaced frame plates 118. The slides 116, made from a friction reducing material such as nylon for example, are aligned with the folding nip roller pairs 112 to accurately guide the knife blade 110 between the rollers on reciprocation of the blade. The individual rollers 112a-112d, which comprise the folding nip roller pairs 112, are designed to maintain significant structural rigidity under load to minimize deflection. For example, the rollers may respectively be constructed as a solid aluminum core coated with rubber with steel shafts knurled and pressed into the bored ends thereof. The lower rollers 112b, 112d of the roller pairs are rotatably supported in the frame plates 118, while the upper rollers 112a, 112c are rotatably supported in spaced subframe plates 118a. The subframe plates 118a are connected to the frame plates 118 respectively by pivot pins 118b located downstream (in the direction of sheet travel) from the folding nip roller pairs. Accordingly, sheets being folded are urged by the knife blade 110 through one roller nip (i.e., between the rollers 112a and 112b) and then through the other roller nip (i.e., between the rollers 112c and 112d).

In order to accomplish neat folding of the sheets of the reproduction set, it is necessary to provide a desired predetermined engagement force between the rollers of the folding roller nip pairs 112 as the sheets of the reproduction set are urged therebetween. Accordingly, a compression assembly 120 is provided. The compression assembly 120 (best shown in Figs. 5, 6c, and 7) includes an upper anchor bar 120a interconnected between the frame plates 118 and a lower anchor bar 120b interconnected between the subframe plates 118a. A pair of compression springs 122 are retained between the

- 15 -

upper anchor bar 120a and the lower anchor bar 120b by long bolts 124. The long bolts are guided in bearings in the upper anchor bar and are threaded to the lower anchor bar to maintain a predetermined preload force between the bars and thus between the associated structure including, ultimately, the nip roller pairs 112. The attachment of the upper and lower anchor bars to the frame plates and subframe plates respectively are by way of pivot pins 126. The pivot pins 126 enable the anchor bars 120a, 120b to pivot relative to the frame plates 118 and the subframe plates 118b in order to prevent binding of the long bolts 124 as the springs 122 compress during the folding operation.

The provision of folding nip roller pairs 112 offers several significant advantages in the operation of the folding mechanism 94. Due to the location of the compression springs 122 of the compression assembly 120 relative to the nip roller pairs 112 and the pivotal relationship between the upper rollers and lower rollers of the nip roller pairs, a different mechanical advantage is exhibited at each of the nip roller pairs. Specifically, the mechanical advantage at the second nip roller pair (rollers 112b and 112d) closest to the pivot axis of the subframe plates 118a is significantly greater than the mechanical advantage at the first nip roller pair (rollers 112a and 112c), for example on the order of twice as large. Therefore, the fold formed in the reproduction set is accomplished in two steps of increasing clamping force. Thus the force at the first nip roller pair may be set to be substantially less than has heretofore been necessary to accomplish the desired booklet folding. With this arrangement, it is not a concern that the fold at the first nip roller pair be complete, and accordingly the force at such first nip pair can be set to assure the starting of an accurate and neat fold without forcing the reproduction set to be folded into the nip under such pressure as might damage the set. Moreover, as the reproduction set being folded passes through the first nip roller pair, the subframe plates 118a are wedged slightly open relative to the frame plates 118. Therefore, the greater force-applying second nip roller pair is already somewhat spread apart to readily receive the reproduction set being folded to complete the folding operation. With this arrangement then, the first nip roller pair is thus wedged

- 16 -

open with a relatively light (non-damaging to the reproduction set) force irrespective of the thickness of the reproduction set being folded, and the second nip roller pair is accordingly partially opened by the set passing through the first nip roller pair. As a result, the folding mechanism 94 is effectively operational to automatically fold reproduction sets of various thicknesses without the need for a nip gap adjustment mechanism as would be required to accommodate various reproduction set thicknesses when only one nip roller pair is utilized to accomplish the folding operation.

10 In order to effect selective reciprocation of the knife blade 110, under the control of unit C, the folding mechanism 94 of the saddle stitcher 90 includes a motor 130 having an output shaft 130a (see Fig. 6c). The output shaft 130a is drivingly connected to a main pulley 132a of a belt-and-pulley drive arrangement 132 (see Fig. 6b). A plurality of
15 elements of the drive arrangement 132 are coupled respectively to the rollers 112a-112d of the folding roller nip pairs 112 to continuously rotate the rollers. Further, elements of the drive arrangement 132 are coupled to drive gears 134, fixedly mounted on a cross shaft 134a, through a clutch mechanism 136 to rotate the cross shaft (and thus the drive gears)
20 on actuation of the clutch mechanism. The drive gears 134 mesh with cranks 138 (see Fig. 6a) which have links 140 pivotably connected at their respective ends to the cranks and the knife blade support bar 114.

A switch (not shown) of any well known type detects the angular position of the cranks 138 and provides a signal for the control unit C to
25 effect actuation of the clutch mechanism 136. Such clutch mechanism actuation occurs for one revolution of the cranks 138 so that for each reproduction set to be folded, the knife blade 110 is reciprocated through one complete stroke. A complete stroke of the knife blade 110 contemplates travel of the blade a distance sufficient to urge the
30 reproduction set being folded completely through the folding mechanism 94 and out of the nip roller pairs 112 where the formed booklet falls under the influence of gravity into the output hopper 98. The hopper 98 is mounted in the housing 32 of the modular finisher 10 on slides 98a so as to enable the hopper to move to a convenient location, for example
35 external to the housing, to facilitate operator retrieval of the folded booklets collected in the hopper.

- 17 -

In one embodiment of the saddle stitcher 90 according to this invention, the links 140 are of somewhat different lengths. Accordingly, the angle of the knife blade 110 relative to the folding nip roller pairs 112 changes during the reciprocation of the knife blade. As
5 a result, the reproduction set being folded is sent into the nips of the roller pairs at a skewed angle (rather than squarely with respect to the nips) so that the edge being folded does not contact the nip rollers all at once. Rather, the fold is effected sequentially in the direction of the fold during a segment of the travel distance of the reproduction set through
10 the nip. This results in a tighter fold than can be accomplished when the fold is produced all at once (for a given nip pressure), and reduces the noise and power to complete the fold.

In another embodiment of the saddle stitcher according to this invention, the rollers of the folding nip roller pairs have a plurality of
15 under-cut portions for accepting a complementary shaped knife blade. As shown in Figs. 8a and 8b, an exemplary roller pair designated by the numeral 112' has undercut portions 142. Such under-cut portions readily receive complementary portions 144 of the knife blade 110' in a substantially non-contacting manner. With such arrangement, the the
20 angle of the knife blade to the nip roller pairs can be kept square, thus assuring a square fold in forming the reproduction set into a folded booklet, and the force on the roller pairs to effect folding is substantially independent of the insertion of the knife blade therebetween.

Turning now to the module defining the insert tray 150 (shown
25 in Fig. 1), the insert tray is for the purpose of providing the modular finisher 10 according to this invention with the ability to selectively add additional sheets to a reproduction set. For example the additional sheets may be preprinted cover sheets of the same or different stock characteristics to the sheets of the reproduction set, or may be sheets
30 utilized within a reproduction set to separate distinct portions of the set. The insert tray 150 includes a sheet receiving hopper 152 removably locatable in the top cover 154 for the finisher 10. The hopper 152 has appropriate guides (not shown) for aligning a stack of sheets therein relative to a sheet feed device 156. The sheet feed device 156, of any
35 well known type such as a scuff feeder or a vacuum feeder

- 18 -

for example, is activated by the control unit C when it is desired to selectively feed a single sheet from the hopper 152 to have such sheet inserted into a reproduction set being received by the finisher 10. The sheet is fed into a transport path P_4 communicating with the transport
5 path P_1 of the upper transport module 20 between the entrance E and the diverter 28. Accordingly, the additional sheet is selectively inserted into the path P_1 at a desired time during the finishing of a reproduction set to be treated the same as any other sheet in the set during the finishing operation.

10

15

20

25

30

35

- 19 -

WE CLAIM:

1. For use with a reproduction apparatus producing reproduction sets of a series of reproductions reproduced on sheets respectively, an improved modular finisher apparatus for forming completely finished reproduction sets, said improved modular finisher apparatus characterized by including a first housing, a cover for said first housing, first auxiliary modular device receiving means for receiving an auxiliary modular device in said cover, means in said first housing for receiving sheets of reproduction sets from said reproduction apparatus, means in said first housing for defining a first feed path extending from said receiving means, second auxiliary modular device receiving means for receiving an auxiliary modular device in said first housing, a second housing associated with said first housing, means in said second housing communicating with said first feed path defining means for collecting sheets from said first feed path defining means, means in said second housing for stapling collected sheets into stapled reproduction sets, means associated with said second housing for collecting stapled reproduction sets, means, in said second housing defining a second feed path from said sheet collecting means to said set collecting means, for directing stapled reproduction sets from said sheet collecting means to said set collecting means, third auxiliary modular device receiving means for receiving an auxiliary modular device in said second housing, at least one auxiliary modular device selected from the group of a Z-folder, a saddle stitcher, and an insert tray; said selected at least one auxiliary modular device being received in said first, second, or third auxiliary modular device receiving means, and means for providing sheet transport paths from said first feed path defining means to any of the selected auxiliary modular devices.

2. The improved modular finisher of Claim 1 characterized in that said reproduction set collecting means includes an output hopper attached to said second housing externally thereof, and an opening defined in said second housing, said opening being located so as to provide communication between said second feed path defining means and said output hopper.

3. The improved modular finisher of Claim 2 characterized in that said output hopper includes a tray, an elevator mechanism coupled to said tray to selective raise and lower said tray relative to said opening

- 20 -

in said second housing so as to position the top of a stack of reproduction sets received on said tray at a level to receive the next subsequent reproduction set on the top such stack.

4. The improved modular finisher of Claim 3 characterized by
5 said output hopper further including a mechanism coupled to said tray
for selectively moving said tray in a direction transverse to the direction
of movement of a reproduction set as it is received in said tray, and
means for controlling operation of said mechanism between the receiving
of sequential reproduction sets so that such sets are relatively offset when
10 stacked on said tray.

5. The improved modular finisher of Claim 3 characterized in
that said tray of said output hopper is positioned relative to the direction
of movement of reproduction sets received at said tray at an angle to the
horizontal so as to intercept the path of such sets received at said tray.

15 6. The improved modular finisher of Claim 5 characterized by
said output hopper further including a guide plate located relative to said
tray so as to align the lead edges of reproduction sets received on said
tray, and means for applying a force to the stack of reproduction sets on
said tray to retain such stack its in aligned position against said guide
20 plate.

7. The improved modular finisher of Claim 6 characterized in
that said force applying means includes at least one finger mounted for
movement to a position in contact with the topmost set in the stack of
reproduction sets on said tray and a position remote from said stack, and
25 means for selectively moving said at least one finger to its remote
position as a set is received on said stack on said tray so as not to
interfere with receiving of such set, and thereafter moving said at least
one finger to its contact position to hold such stack in its aligned position
against said guide plate.

30 8. The improved modular finisher of Claim 1 characterized by
said first housing further including a proof set collection tray, means
defining an alternate feed path communicating with said first feed path
defining means and extends to said proof set collection tray, and means
for selectively diverting sheets from said first feed path defining means to
35 said alternate feed path defining means for delivery of sheets to said
proof set tray.

- 21 -

9. The improved modular finisher of Claim 8 characterized by further including control means for: (1) controlling said reproduction apparatus to effect production of an additional reproduction set above the desired number of requested reproduction sets, (2) setting said
5 diverting means to direct the sheets comprising the first reproduction set to said proof set tray, and (3) delaying production of the second and subsequent reproduction sets for a time sufficient to enable the reproduction set directed to said proof set tray to be examined.

10. For use with a reproduction apparatus having a modular
10 finisher apparatus for forming completely finished reproduction sets of a series of reproductions produced on sheets respectively by said reproduction apparatus, said modular finisher including means for receiving, collecting and stapling reproduction sheets and means for detachably accepting modular auxiliary devices including a saddle stitcher,
15 an improved saddle stitcher for said modular finisher characterized by including a support frame, said frame including means for mating with said means for detachably accepting modular devices to enable said frame to be received by such means, means associated with said support frame for defining a sheet feed path communicating with said
20 reproduction sheet receiving means, means mounted on said frame for registering reproduction sheets, means associated with said frame for stapling registered reproduction sheets at substantially the mid-line thereof to form a reproduction set, means for folding a stapled reproduction set substantially along the mid-line thereof, and an output
25 hopper for collecting folded stapled reproduction sets.

11. The improved saddle stitcher of Claim 10 characterized by said registration means including a first gate, and means for selectively moving said first gate to a position intercepting the sheet feed path of said sheet feed path defining means to register reproduction sheets in
30 preparation for stapling, and to a position remote from such path after stapling reproduction sheets into a reproduction set.

12. The improved saddle stitcher of Claim 11 characterized by said registration means further including means for adjustably supporting said first gate on said frame for movement in the direction of the sheet
35 feed path of said sheet feed path defining means, whereby the location at

- 22 -

which said first gate of said registration means intercepts such sheet feed path can be adjusted in accordance with the dimension of reproduction sheets along such sheet feed path so that such reproduction sheets are registered at said first gate with the mid-line of such sheets
5 aligned with said stapling means.

13. The improved saddle stitcher of Claim 12 characterized in that said registration means further includes a second gate positioned to intercept the path of said sheet feed path defining means downstream of said first gate, in the direction of travel of the reproduction sheets, at a
10 location whereby, when said first gate is moved to its remote position, the lead edge of a stapled reproduction set is moved to engage and be registered by said second gate at a position where the mid-line of said stapled reproduction set is aligned with said folding means.

14. The improved saddle stitcher of Claim 13 characterized in that said second gate is interconnected with said first gate so as to move
15 therewith as said first gate is adjusted to similarly adjust said second gate.

15. The improved saddle stitcher of Claim 10 characterized in that said folding means includes an elongated knife blade and a plurality
20 of pairs of nip rollers, said knife blade arranged to urge a stapled reproduction set sequentially through said pairs of nip rollers and then into said output hopper.

16. The improve saddle stitcher of Claim 15 characterized in that said knife blade is mounted for reciprocation in a direction
25 transverse to the sheet feed path of said sheet feed path defining means, said knife blade lying in a plane passing through the mid-line of a stapled reproduction set and the nips of said pairs of nip rollers.

17. The improved saddle stitcher of Claim 16 characterized in that said folding means includes means for reciprocating said knife blade
30 in said plane at an angle to the nip line of said pairs of nip rollers to pass through said nips thereof progressively, whereby the fold in a reproduction set is effected sequentially in the direction of the fold during a segment of the travel distance of such reproduction set through said nips.

35 18. The improved saddle stitcher of Claim 17 characterized in that said reciprocating means includes a rotatable drive shaft, at

- 23 -

least one crank rotatably driven by said drive shaft, at least one link connected to said at least one crank at one end and connected at its opposite end to said knife blade.

19. The improved saddle stitcher of Claim 18 characterized in
5 that said reciprocating means includes a motor having a rotating output shaft, clutch means for selectively coupling said motor output shaft to said drive shaft, and control means for actuating said clutch means to couple said output shaft to said drive shaft for a time sufficient to rotate said crank through one revolution to effect one reciprocation cycle for
10 said knife blade.

20. The improved saddle stitcher of Claim 19 characterized in
that said reciprocating means includes a pair of cranks and a pair of links associated respectively therewith, said links being connected to opposite ends of said elongated knife blade, with one link being longer
15 than the other link.

21. The improved saddle stitcher of Claim 16 characterized in
that said folding means includes a subframe, and means for urging said subframe toward said frame; and wherein one roller of each of said plurality of pairs of nip rollers is supported in said frame, and the other
20 roller of each of said plurality of pairs of nip rollers is supported in said subframe.

22. The improved saddle stitcher of Claim 21 characterized in
that said folding means includes a pivot pin for pivotably connecting said subframe to said frame, said pivot pin is located downstream, in the
25 direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers, and said urging means is located upstream, in the direction of travel of a reproduction set being folded, from said plurality of pairs of nip rollers, whereby a progressively increasing mechanical advantage is exhibited at each of said nip roller pairs.

23. The improved saddle stitcher of Claim 15 characterized in
that said output hopper is selectively movable to a location to collect folded reproduction sets exiting said plurality of pairs of nip rollers of said folding means, and to a remote location where removal of collected folded reproduction sets from said output hopper is facilitated.
30

24. For use with a reproduction apparatus having an associated modular finisher apparatus for forming completely finished
35

- 24 -

reproduction sets of a series of reproductions produced on sheets respectively by said reproduction apparatus, said modular finisher including an improved saddle stitcher comprising a support frame, means associated with said support frame for defining a sheet feed path for
5 receiving reproduction sheets, means mounted on said frame for registering reproduction sheets, means associated with said frame for stapling registered reproduction sheets at substantially the mid-line thereof to form a reproduction set, means for folding a stapled reproduction set substantially along the mid-line thereof, said folding
10 means including an elongated knife blade mounted for reciprocation in a direction transverse to the sheet feed path of said sheet feed path defining means, a plurality of pairs of nip rollers, and means for reciprocating said knife blade in a plane passing through the mid-line of a stapled reproduction set and the nips of said pairs of nip rollers to
15 urge a stapled reproduction set sequentially through said pairs of nip rollers, and an output hopper for collecting folded stapled reproduction sets exiting from said pairs of nip rollers.

25. The improved saddle stitcher of Claim 24 characterized in that said reciprocating means includes a pair of cranks and a pair of
20 links associated respectively therewith, said links being connected to opposite ends of said elongated knife blade, a rotatable drive shaft, said cranks being rotatably driven by said drive shaft, a motor having a rotating output shaft, clutch means for selectively coupling said motor output shaft to said drive shaft, and control means for actuating said
25 clutch means to couple said output shaft to said drive shaft for a time sufficient to rotate said crank through one revolution to effect one reciprocation cycle for said knife blade.

26. The improved saddle stitcher of Claim 24 characterized in that one of said links is longer than the other of said links, so that said
30 elongated knife blade on reciprocation is at an angle to the nip line of said pairs of nip rollers to pass through said nips thereof progressively, whereby the fold in a reproduction set is effected sequentially in the direction of the fold during a segment of the travel distance of such reproduction set through said nips.

35 27. The improved saddle stitcher of Claim 24 characterized in that said registration means includes a first gate; means for

- 25 -

selectively moving said first gate to a position intercepting the sheet feed path of said sheet feed path defining means to register reproduction sheets in preparation for stapling, or to a position remote from such path after stapling reproduction sheets into a reproduction set;
5 and a second gate positioned to intercept the path of said sheet feed path defining means downstream of said first gate, in the direction of travel of the reproduction sheets, at a location whereby, when said first gate is moved to its remote position, the lead edge of a stapled reproduction set is moved to engage and be registered by said second
10 gate at a position where the mid-line of said stapled reproduction set is aligned with said folding means.

28. The improved saddle stitcher of Claim 27 characterized in that said registration means further includes means for adjustably supporting said first gate on said frame for movement in the direction of
15 the sheet feed path of said sheet feed path defining means, whereby the location at which said first gate of said registration means intercepts such sheet feed path can be adjusted in accordance with the dimension of reproduction sheets along such sheet feed path so that such reproduction sheets are registered at said first gate with the mid-line of such sheet
20 aligned with said stapling means, and said second gate is interconnected with said first gate so as to move therewith as said first gate is adjusted to similarly adjust said second gate.

29. The improved saddle stitcher of Claim 24 characterized in that said output hopper is selectively movable to a location to collect
25 folded reproduction sets exiting said plurality of pairs of nip rollers of said folding means, and to a remote location where removal of collected folded reproduction sets from said output hopper is facilitated.

30

35

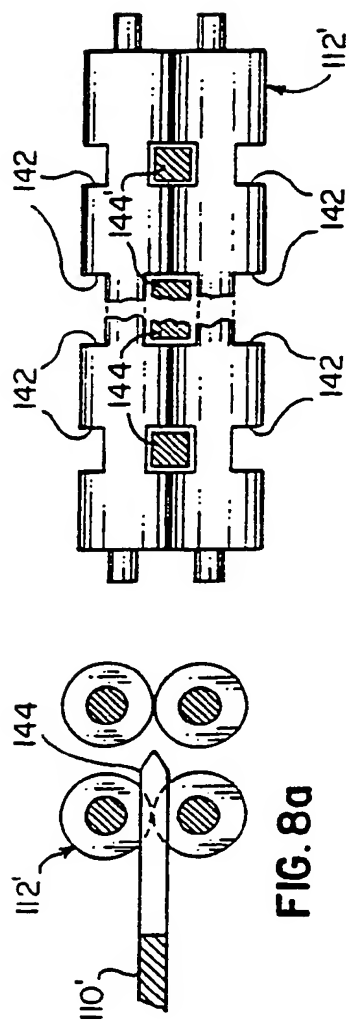


FIG. 8a

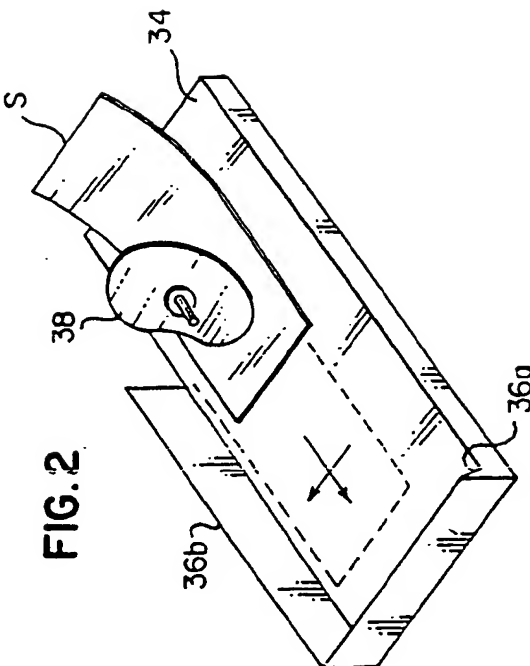


FIG. 2

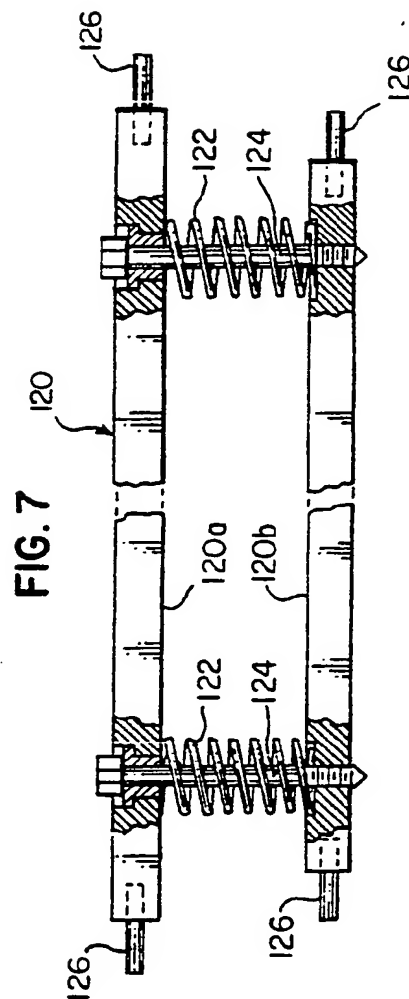


FIG. 7

2/6

FIG. 8b

3/6

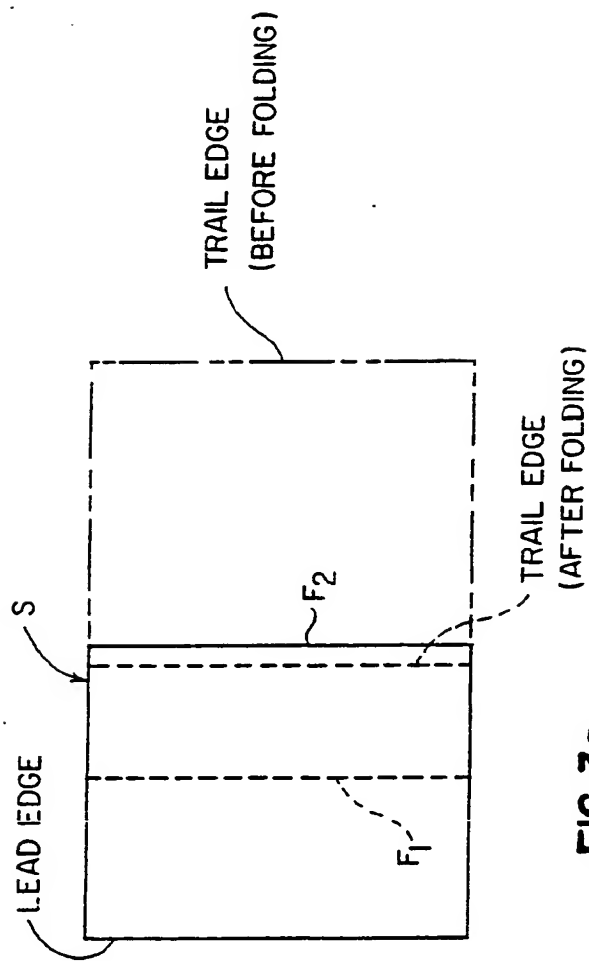


FIG. 3a

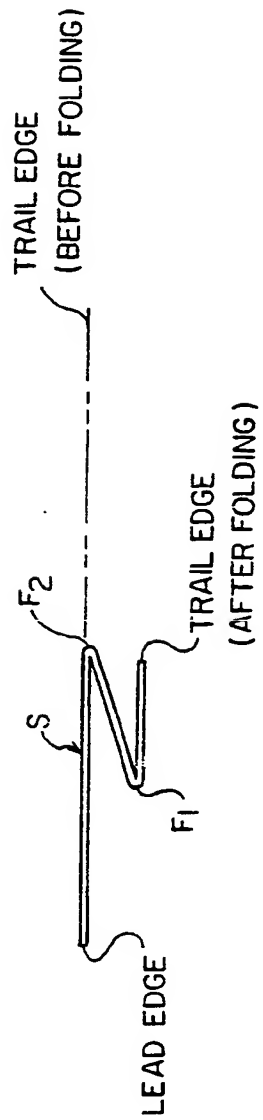


FIG. 3b

4/6

FIG. 4a

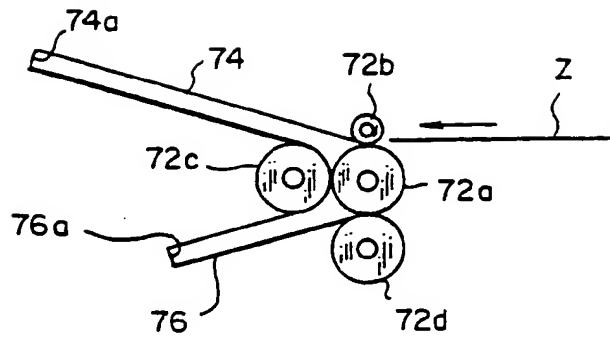


FIG. 4b

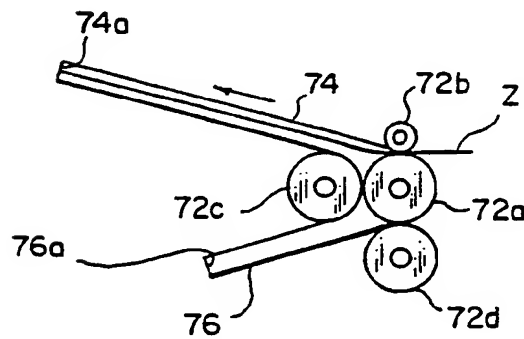


FIG.4c


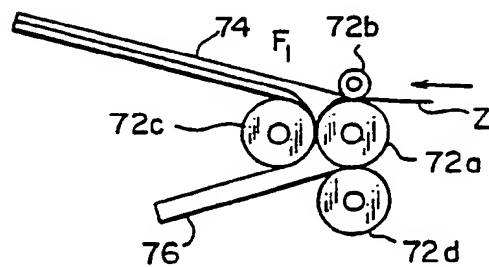


FIG. 4d

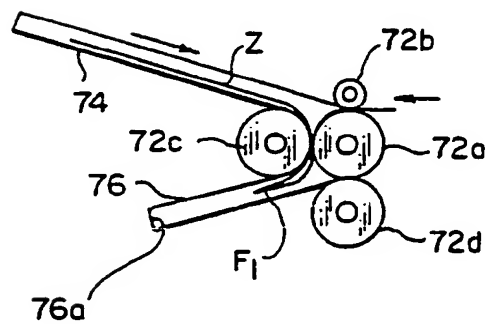

5/6

FIG. 4e

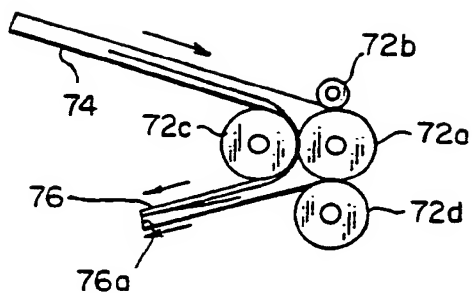


FIG. 4f

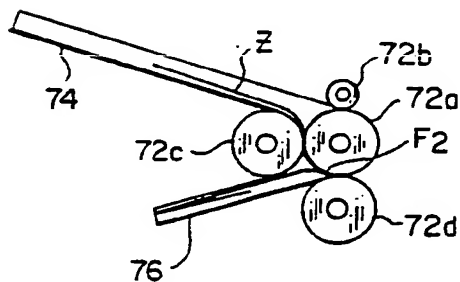


FIG. 4g

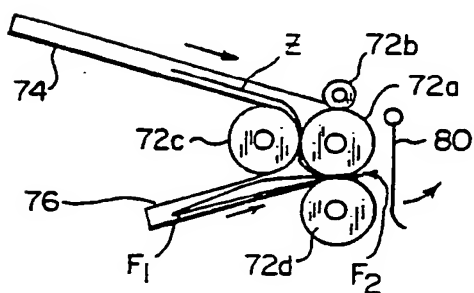
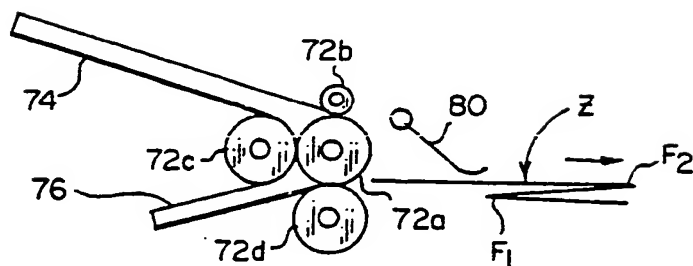


FIG. 4h



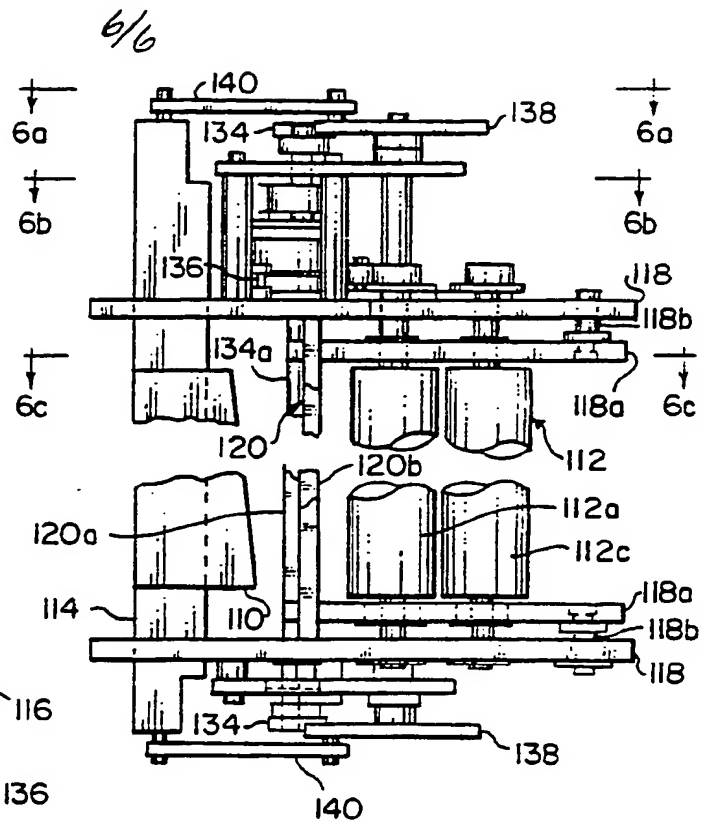


FIG. 5

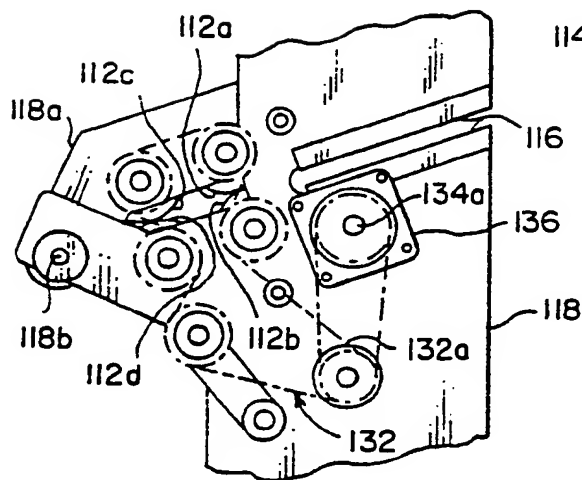


FIG. 6b

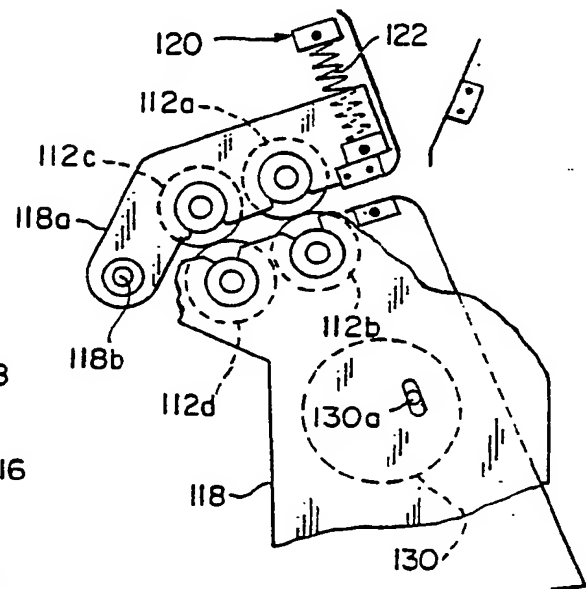


FIG.6c

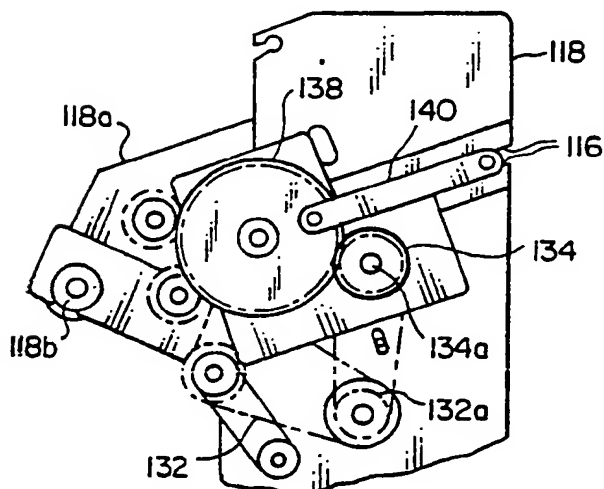


FIG. 6a

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 91/09526

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC IPC5: B 65 H 37/00, G 03 G 15/00														
II. FIELDS SEARCHED <div style="text-align: center;">Minimum Documentation Searched⁷</div> <table style="width: 100%; border: none;"> <tr> <td style="width: 25%; border: none;">Classification System</td> <td style="border: none;">Classification Symbols</td> </tr> <tr> <td style="border: 1px solid black; height: 40px; vertical-align: bottom;">IPC5</td> <td style="border: 1px solid black; height: 40px; vertical-align: bottom;">B 65 H; G 03 G</td> </tr> </table> <div style="text-align: center; font-size: small;">Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in Fields Searched⁸</div>			Classification System	Classification Symbols	IPC5	B 65 H; G 03 G								
Classification System	Classification Symbols													
IPC5	B 65 H; G 03 G													
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹ <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">Category *</th> <th style="width: 70%;">Citation of Document,¹¹ with indication, where appropriate, of the relevant passages¹²</th> <th style="width: 20%;">Relevant to Claim No.¹³</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>GB, A, 2230764 (RICOH COMPANY LIMITED) 31 October 1990, see abstract; figures 1-17 ---</td> <td style="text-align: center; vertical-align: top;">1-29</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>EP, A1, 0346851 (CANON KABUSHIKI KAISHA) 20 December 1989, see column 15 - column 26; figures 1-38 ---</td> <td style="text-align: center; vertical-align: top;">1-29</td> </tr> <tr> <td style="text-align: center; vertical-align: top;">A</td> <td>Patent Abstracts of Japan, Vol 12, No 296, M731, abstract of JP 63- 74874, publ 1988-04-05 (RICOH CO LTD) ---</td> <td style="text-align: center; vertical-align: top;">1-29</td> </tr> </tbody> </table> <div style="font-size: x-small; margin-top: 10px;"> <div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>* Special categories of cited documents:¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 48%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </div> </div> </div>			Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³	A	GB, A, 2230764 (RICOH COMPANY LIMITED) 31 October 1990, see abstract; figures 1-17 ---	1-29	A	EP, A1, 0346851 (CANON KABUSHIKI KAISHA) 20 December 1989, see column 15 - column 26; figures 1-38 ---	1-29	A	Patent Abstracts of Japan, Vol 12, No 296, M731, abstract of JP 63- 74874, publ 1988-04-05 (RICOH CO LTD) ---	1-29
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³												
A	GB, A, 2230764 (RICOH COMPANY LIMITED) 31 October 1990, see abstract; figures 1-17 ---	1-29												
A	EP, A1, 0346851 (CANON KABUSHIKI KAISHA) 20 December 1989, see column 15 - column 26; figures 1-38 ---	1-29												
A	Patent Abstracts of Japan, Vol 12, No 296, M731, abstract of JP 63- 74874, publ 1988-04-05 (RICOH CO LTD) ---	1-29												
IV. CERTIFICATION <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"> Date of the Actual Completion of the International Search <div style="border: 1px solid black; padding: 5px; text-align: center;">6th May 1992</div> </td> <td style="width: 50%; border: none;"> Date of Mailing of this International Search Report <div style="border: 1px solid black; padding: 5px; text-align: center;">27. 05. 92</div> </td> </tr> <tr> <td style="border: none;"> International Searching Authority <div style="border: 1px solid black; padding: 5px; text-align: center;">EUROPEAN PATENT OFFICE</div> </td> <td style="border: none;"> Signature of Authorized Officer <div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; font-size: small;">Danielle van der Haas</div> </div> </td> </tr> </table>			Date of the Actual Completion of the International Search <div style="border: 1px solid black; padding: 5px; text-align: center;">6th May 1992</div>	Date of Mailing of this International Search Report <div style="border: 1px solid black; padding: 5px; text-align: center;">27. 05. 92</div>	International Searching Authority <div style="border: 1px solid black; padding: 5px; text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; font-size: small;">Danielle van der Haas</div> </div>								
Date of the Actual Completion of the International Search <div style="border: 1px solid black; padding: 5px; text-align: center;">6th May 1992</div>	Date of Mailing of this International Search Report <div style="border: 1px solid black; padding: 5px; text-align: center;">27. 05. 92</div>													
International Searching Authority <div style="border: 1px solid black; padding: 5px; text-align: center;">EUROPEAN PATENT OFFICE</div>	Signature of Authorized Officer <div style="border: 1px solid black; padding: 5px;"> <div style="text-align: right; font-size: small;">Danielle van der Haas</div> </div>													

Form PCT/ISA/210 (second sheet) (January 1985)

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		Relevant to Claim No
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	
A,D	US, A, 4134672 (L.E. BURLEW ET AL) 16 January 1979, see abstract; figures 2-15 --	1-29
A,D	US, A, 4169674 (M.J. RUSSEL) 2 October 1979, see column 4 - column 5; figures 1-5 --	1-29
A	US, A, 4313670 (J.R. CALDWELL) 2 February 1982, see column 2 - column 17; figures 2-15 --	1-29
A	US, A, 4497478 (R. RESCHENHOFER ET AL) 5 February 1985, see column 3 - column 6; figures 1-8 --	1-29
A	US, A, 4509732 (T. KANNO ET AL) 9 April 1985, see column 10 - column 14; figures 1-19 --	1-29
A	US, A, 4595187 (H.T. BOBER) 17 June 1986, see column 2 - column 4; figures 1-7 --	1-29
A	US, A, 4603971 (W.P. KUKUCKA ET AL) 5 August 1986, see column 3 - column 7; figures 1-5 --	1-29
A	US, A, 4717134 (N. IIDA ET AL) 5 January 1988, see column 2 - column 7; figures 1-12 --	1-29

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	US, A, 4871158 (J.N. MAY ET AL) 3 October 1989, see column 3 - column 6; figures 1-3 --	1-29
A	US, A, 4878656 (T. HONJO ET AL) 7 November 1989, see column 3 - column 9; figures 1-8 --	1-29
A,D	US, A, 4903952 (S.M. RUSSEL ET AL) 27 February 1990, see abstract; figures 1-4 --	1-29
A	US, A, 4917364 (N. IIDA ET AL) 17 April 1990, see column 2 - column 6; figures 1-10 --	1-29
A	US, A, 4917366 (K. MURAKAMI ET AL) 17 April 1990, see column 5 - column 25; figures 1-34 --	1-29
A,D	US, A, 4930765 (S.M. RUSSEL ET AL) 5 June 1990, see column 2 - column 3; figures 1-4 --	1-29
A	US, A, 5007625 (H.T. KREMERS ET AL) 16 April 1991, see column 3 - column 8; figures 1-4 -- -----	1-29

Form PCT/ISA/210 (extra sheet) (January 1985)

FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE¹

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers....., because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim numbers..... because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim numbers..... because they are dependent claims and are not drafted in accordance with the second and third sentences of PCT Rule 6.4(a).

VI. ☒ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING²

This International Searching Authority found multiple inventions in this international application as follows:

1. Claim 1-9: An improved modular finisher apparatus
2. Claim 10-23: An improved saddle stitcher for said finisher apparatus
3. Claim 24-29: An improved saddle stitcher for said finisher apparatus, including folding means comprising a knife blade

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the the claims. It is covered by claim numbers:
4. ☒ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/US 91/09526**

SA 55984

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 28/03/92. The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2230764	31/10/90	DE-A- 4012285	22/11/90
		US-A- 5083760	28/01/92
		JP-A- 2276691	13/11/90
		JP-A- 2276692	13/11/90
		JP-A- 2279388	15/11/90
		JP-A- 2279389	15/11/90
EP-A1- 0346851	20/12/89	JP-A- 1313261	18/12/89
		JP-A- 2023150	25/01/90
		JP-A- 2033065	02/02/90
US-A- 4134672	16/01/79	NONE	
US-A- 4169674	02/10/79	BE-A- 835568	13/05/76
		CA-A- 1077556	13/05/80
		CH-A- 605362	29/09/78
		DE-A-B-C 2550985	26/05/76
		FR-A-B- 2291135	11/06/76
		GB-A- 1492466	23/11/77
		JP-C- 1290592	29/11/85
		JP-A- 55098762	28/07/80
		JP-B- 56040338	19/09/81
US-A- 4313670	02/02/82	CA-A- 1144301	12/04/83
		EP-A-B- 0028165	06/05/81
		JP-B- 2055777	28/11/90
		JP-A- 56074270	19/06/81
US-A- 4497478	05/02/85	DE-A- 3234746	22/03/84
		JP-A- 59212358	01/12/84
US-A- 4509732	09/04/85	DE-A-C- 3006936	28/08/80
		JP-A- 55115541	05/09/80
US-A- 4595187	17/06/86	NONE	
US-A- 4603971	05/08/86	JP-A- 61075769	18/04/86
US-A- 4717134	05/01/88	JP-A- 61211272	19/09/86
		US-A- 4883265	28/11/89
		US-A- 4917364	17/04/90
		JP-A- 61217476	27/09/86
		JP-A- 61243771	30/10/86
US-A- 4871158	03/10/89	NONE	

For more details about this annex : see Official Journal of the European patent Office, No. 12/82

EPO FORM P0478

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. PCT/US 91/09526

SA 55984

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on 28/03/92
The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4878656	07/11/89	JP-A- 63235258	30/09/88
		JP-A- 63235257	30/09/88
		JP-A- 63235259	30/09/88
		JP-A- 63235260	30/09/88
US-A- 4903952	27/02/90	EP-A- 0389599	03/10/90
		JP-T- 3500999	07/03/91
		WO-A- 90/02050	08/03/90
US-A- 4917364	17/04/90	JP-A- 61211272	19/09/86
		US-A- 4717134	05/01/88
		US-A- 4883265	28/11/89
		JP-A- 61243465	29/10/86
		US-A- 4811039	07/03/89
US-A- 4917366	17/04/90	DE-A-C- 3705895	10/09/87
		DE-A- 3744948	11/10/90
		DE-A- 3744949	04/10/90
		GB-A-B- 2187174	03/09/87
		GB-A- 2221454	07/02/90
		GB-A-B- 2221455	07/02/90
		JP-A- 62196676	31/08/87
		JP-A- 62196677	31/08/87
		JP-A- 62196246	29/08/87
		JP-A- 62196247	29/08/87
		JP-A- 62196248	29/08/87
		JP-A- 62196249	29/08/87
		JP-A- 62239169	20/10/87
		JP-A- 62239170	20/10/87
		JP-A- 62239171	20/10/87
		JP-A- 62239176	20/10/87
		JP-A- 62239172	20/10/87
		JP-A- 62239174	20/10/87
		JP-A- 62290678	17/12/87
		JP-A- 62290653	17/12/87
		JP-A- 62289864	16/12/87
		JP-A- 62289865	16/12/87
		JP-A- 62289863	16/12/87
		JP-A- 62289860	16/12/87
US-A- 4930765	05/06/90	NONE	
US-A- 5007625	16/04/91	CA-A- 2021746	25/02/91
		EP-A- 0414503	27/02/91

For more details about this annex : see Official Journal of the European patent Office, No. 12/82

EPO FORM P0479

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. PCT/US 91/09526

SA 55984

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on 28/03/92
The European Patent office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 5007625	16/04/91	JP-A- 3106754	07/05/91

For more details about this annex : see Official Journal of the European patent Office, No. 12/82

EPO FORM P0479

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)